


Mission Success

Ensign-Bickford Aerospace & Defense Company (EBAD) is dedicated to supporting our customers in the aerospace and defense industry through on-time delivery of innovative products that exceed expectations and assure mission success.

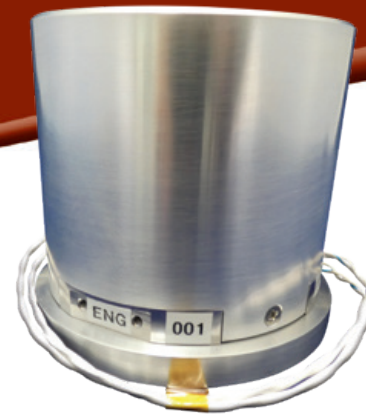

Model 9108 Hold Down & Release Mechanism

EBAD is the global leader in non-pyro Hold Down and Release Mechanisms (HDRM). Hold Down & Release Mechanisms, also sometimes referred to as Separation Nut Release Mechanisms, are offered in a range of sizes. The NEA® Model 9108 is EBAD's largest HDRM supports ultimate loads as high as 600kN (135,000 lbf).

Principle of Operation

The NEA® HDRM is an electrically initiated, one-shot release mechanism that has the ability to carry a very high tensile preload until commanded to release. The preload is applied through a release rod held in place by two separable spool halves which are in turn held together by tight winding of restraining wire. The restraint wire is held in place by redundant electrical fuse wires; actuation of either circuit allows release, assuring maximum reliability. When sufficient electrical current is applied, the restraint wire unwinds allowing the spool halves to separate releasing the release rod and the associated preload.

EBAD has developed a companion HDRM Firing Unit (HFU) that multiplexes a single Launch Vehicle firing order to fire (4) Model 9108's in diagonal pairs or simultaneously. The HFU assures proper current application to the HDRM to assure tight actuation simultaneity between the HDRMs. The HFU provides safety interlocks for Arming and Firing and provides status of HFU and HDRM for integration operations and launch readiness assurance.

EBAD has the capability to pair our HDRMs with other hardware such as custom release rods, preload nuts, extractors, bolt catchers, mounting brackets, springs, connectors and electrical harnessing to provide low-shock, high reliability release assemblies.

Applications

Typical applications include:

- Antennas, reflectors, solar arrays, and deployable radiators
- Booms, masts, and scientific instruments
- Satellite and spacecraft deployment
- Launch vehicle and missile stage and fairing separation
- Missile payload separation

Key Features

- Non-explosive hold down & release function
- High restrained preload
- Extremely low release shock
- High simultaneity of multiple hold-down points
- Wide operating temperature range
- Can be operated with pyrotechnic initiation circuitry
- Space-rated materials
- Factory refurbishments
- More than 20 years of flight heritage
- Flight pedigree on more than 500 space platforms

Model 9108 Technical Specifications

Parameter	Capability
Ultimate Load Rating	600 kN (135,000 lbf)
Proof Load Rating	480.4 kN (108,000 lbf)
Release Load Rating	400 kN (90,000 lb-f)
Shock @ Preload ¹	<1000 Gpeak at 102k lbf preload
Fuse Wire Resistance	0.75Ω to 2.0 Ω @ 25°C
Actuation Current ²	4 Amps for 60 ms (minimum recommended)
No-Fire Current (continuity)	250 mAmps at 10-5 Torr @ 110°C
Release Time ³	< 200 ms
Qualification Temperature Range ⁴	-145deg C to + 105deg C
Maximum Angular Misalignment	3° Cone
Mass ⁵	3855 g (8.5 lb)

Notes:

- 1 Shock is preload dependent, contact applications engineering for shock at other preloads.
- 2 Actuation can be achieved using a range of current, the value in the table is the value used for qualifying this device.
- 3 Release time is dependent on actuation current, contact applications engineering for more specific information on actuation time as a function of current.
- 4 The values presented for qualification temperature range are not a measure of the limits of the device.
- 5 Mass does not include harnessing and lead wires.

Model 9108 Hold Down & Release Mechanism (HDRM) Mechanical Interface Drawing

