


Mission Success

Ensign-Bickford Aerospace & Defense Company (EBAD) is dedicated to supporting our customers in the aerospace and defense industry through on-time delivery of innovative products that exceed expectations and assure mission success.

**NEA® Model 9103CC1**  
Hold Down & Release Mechanism (HDRM)

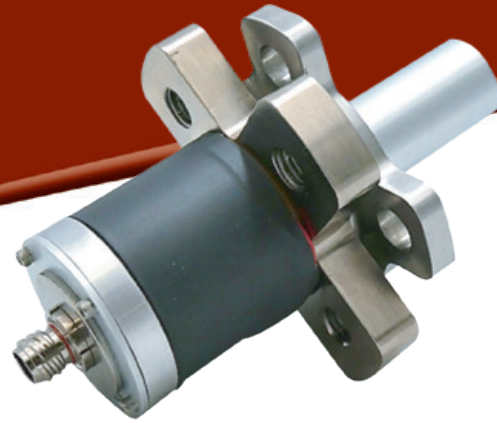

**NEA® Model 9103CC1**  
Hold Down & Release Mechanism (HDRM)

**Model 9103CC1 Hold Down & Release Mechanism**

EBAD is the global leader of non-pyrotechnic Hold Down & Release Mechanism (HDRM) for the space and defense markets. EBAD's industry-leading NEA® and TiNi™ mechanisms are offered in a range of sizes and custom mounting configurations.

The NEA® Model 9103CC1 is based on the Model 9103, integrating a cup/cone shear load interface, a bolt extractor, a bolt catcher, and source shock reduction elements to form a HDRM that's ideal for multi-point satellite release. In a 4-point release configuration, the 9103CC1 is designed to dispense up to 1000kg payloads separating laterally from a central dispensing structure. The 9103CC1 is delivered fully preloaded, so integration into space platforms is greatly simplified. The 9103CC1 is easily scaled up and down in load capacity by using a different NEA® HDRM model.

**Principle of Operation**

The NEA® Model 9103CC1 is an electrically initiated, one-shot mechanism that carries very high mechanical loads until commanded to release. The preload is applied through a release bolt that tightly restrains a cup/cone shear load interface. The bolt is held in place by two separable spool halves which are in turn held together by tight winding of restraining wire. The restraint wire is held in place by redundant electrical fuse wires; actuation of either circuit allows release, assuring maximum reliability. When sufficient electrical current is applied, the restraint wire unwinds allowing the spool halves to separate releasing the release bolt and allowing the two halves of the cup/cone interface to separate.

EBAD has developed a companion HDRM Firing Unit (HFU) that multiplexes a single Launch Vehicle firing order to actuate (4) Model 9103CC1's in diagonal pairs or simultaneously. The HFU assures proper current application to the HDRM to assure tight actuation simultaneity between the HDRMs. The HFU provides safety interlocks for Arming and Firing and provides status of HFU and HDRM for integration operations and launch readiness assurance.

**Applications**

Typical applications include retention and release of:

- Antennas, reflectors, solar arrays, and deployable radiators
- Booms, masts, and scientific instruments
- Satellite and spacecraft deployment
- Launch vehicle and missile stage and fairing separation
- Missile payload separation

**Key Features**

- Non-explosive hold down & release function
- High restrained preload
- Extremely low release shock
- High simultaneity of multiple hold-down points
- Wide operating temperature range
- Can be operated with pyrotechnic initiation circuitry
- Space-rated materials
- Factory refurbishments
- More than 20 years of flight heritage
- Flight pedigree on more than 750 space platforms


**Model 9103CC1 Technical Specifications**

Parameter	Capability
<b>Preload (as Delivered)</b>	37.8 to 38.2 kN (8,500 to 8,600 lbf)
<b>Shear Load</b>	55.4 kN (12,450 lbf)
<b>Export Shock (Satellite Interface)<sup>1</sup></b>	20G @ 2kHz, 180G @ 9kHz
<b>Export Shock (Dispenser Interface)<sup>1</sup></b>	30G @ 2kHz, 390G @ 9kHz
<b>Fuse Wire Resistance</b>	1.2 Ω to 2.0 Ω @ 25°C
<b>Actuation Current<sup>2</sup></b>	4 Amps for 25ms
<b>No-Fire Current<sup>3</sup></b>	250 mAmps at 10-5 Torr @ 110°C
<b>Release Time @ Actuation Current<sup>4</sup></b>	<15 mSec @ 7 Amps for 10 mSec
<b>Release Simultaneity @ Actuation Current</b>	+/- 2.5 mSec @ 7 Amps for 10 mSec
<b>Total Mass</b>	1240 grams (2.73 lbm)
<b>Fly Away Mass (Satellite Interface)</b>	309 grams (0.68 lbm)
<b>Operational Temperature Range<sup>5</sup></b>	-135°C to +135°C

Notes:

- <sup>1</sup> Export shock measurement uses HDRM preload of 37.8kN, NASA standard aluminum test plate, and accelerometers adjacent to the HDRM.
- <sup>2</sup> Actuation can be achieved using a wide range of current
- <sup>3</sup> No-fire current for 5 minutes
- <sup>4</sup> Release time is dependent on actuation current.
- <sup>5</sup> The values for operational temperature range are not the limits of the device.

**Model 9103CC1 Hold Down & Release Mechanism (HDRM) Mechanical Interface Drawing**

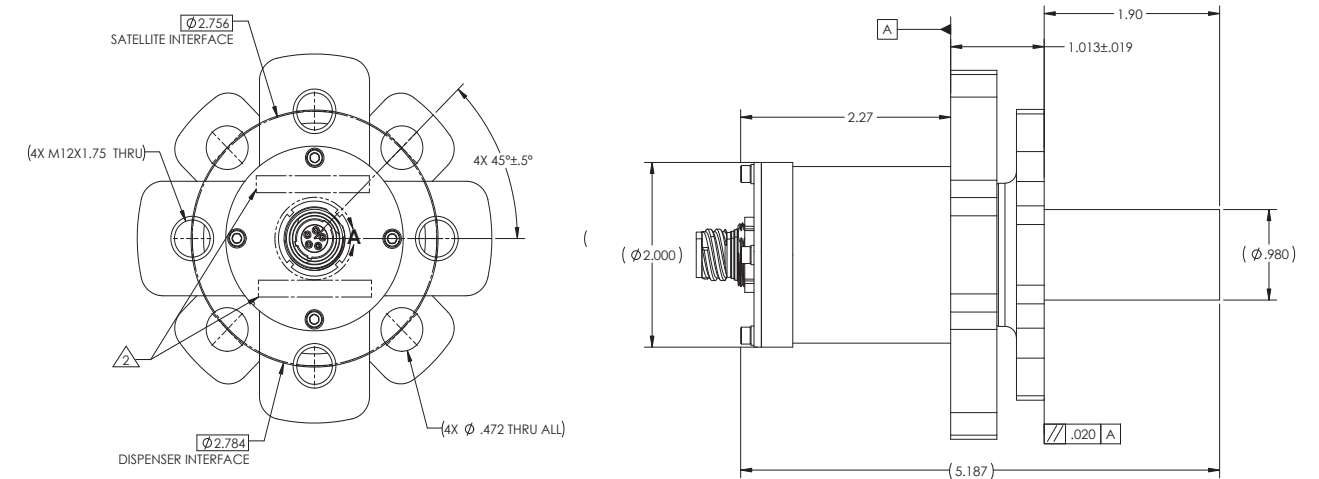

*Note: Model 9103CC1 HDRM shown. Different configurations available with alternate mounting features and connectors. Smaller and larger configurations available to accommodate different payloads.*

**SIGN-BICKFORD AEROSPACE & DEFENSE COMPANY**  
640 HOPMEADOW STREET, P.O. BOX 429, SIMSBURY, CT 06070, USA [www.EBAD.com](http://www.EBAD.com)

NEA® is a registered trademark of NEA Electronics, Inc. This product and its components are protected under U.S. Patent Numbers 6,433,990 / 6,249,063 as well as France Patent Numbers 125567 / 9903335, U.K. Patent Number 1255675 and Germany Patent Number 60111923.1.

**Attention:** The information and recommendations described in this brochure cannot possibly cover every application of the products or variation of conditions under which the products are used. The recommendations here in are based on the manufacturer's experience, research and testing. They are believed to be accurate, but no warranties are made, express or implied. In addition, the specifications contained herein are all nominal which represent our current production. The products described may be subject to change. Please feel free to contact Ensign-Bickford Aerospace & Defense Company for verification. No Warranties or Liabilities: THE PRODUCTS DESCRIBED HEREIN are sold "AS IS" and without any warranty or guaranty, express, or implied, arising by law or otherwise including without limitation any warranty of merchantability or fitness for a particular purpose. Buyer and user agree further to release and discharge seller from any and all liabilities whatsoever arising out of the purchase or use of any product described herein whether or not such liability is occasioned by seller's negligence or based upon strict products liability or upon principles of indemnity or contribution. **Content©2022 Ensign-Bickford Aerospace & Defense Company, Simsbury, CT 06070, U.S.A.**